



BATTERY MODULE COMBINATION TABLE

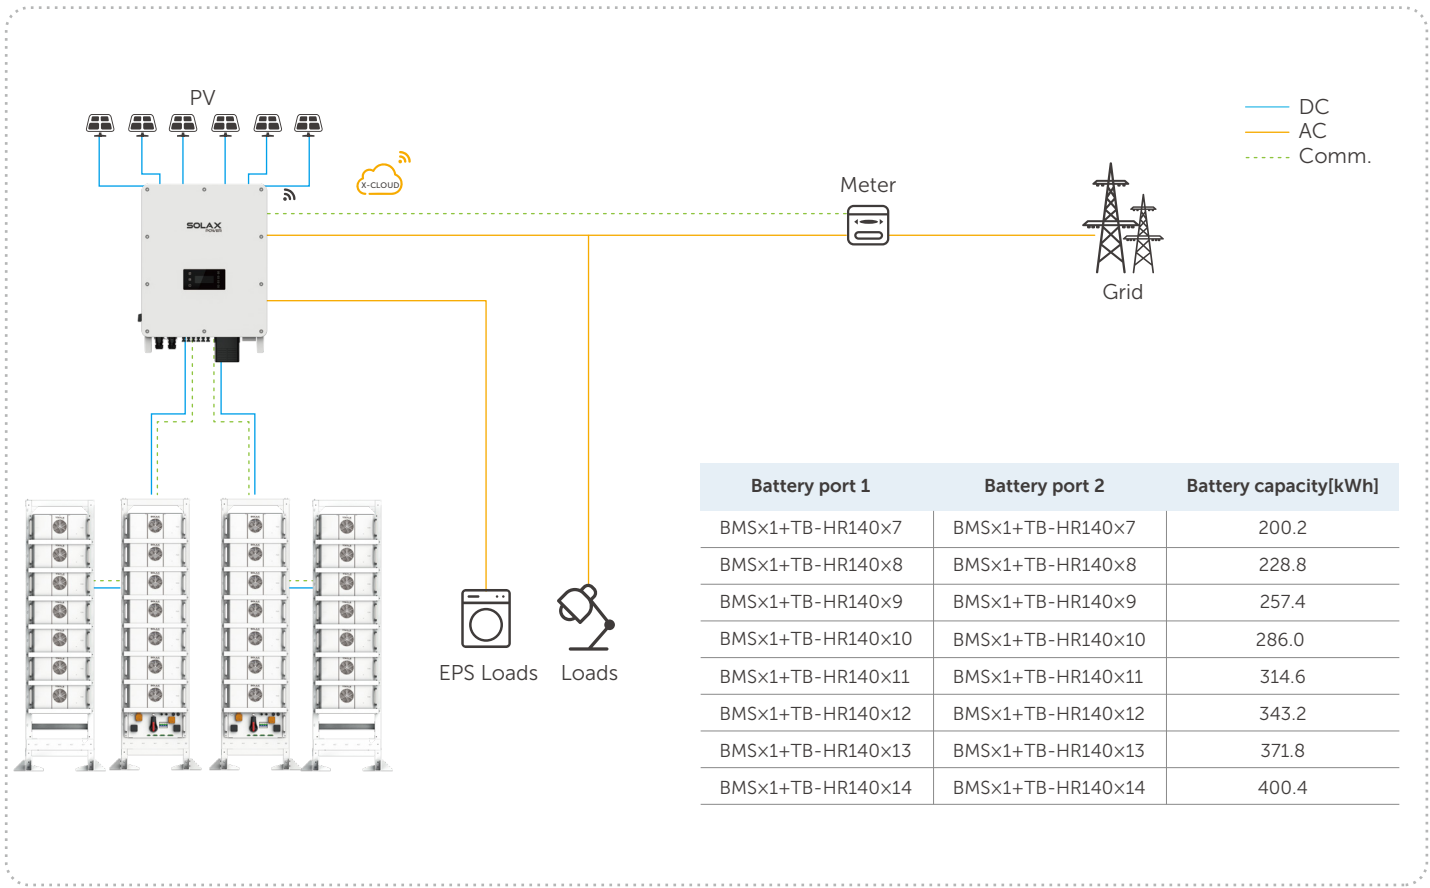

① Test conditions: 90% DOD, 0.2C charger & discharger @ 25°C
② Max. charge / discharge current may be variant with different inverter models
③ Nominal / Maximum operation current and nominal / maximum power derating will occur related to temperature or SOC

*Manufactured in China

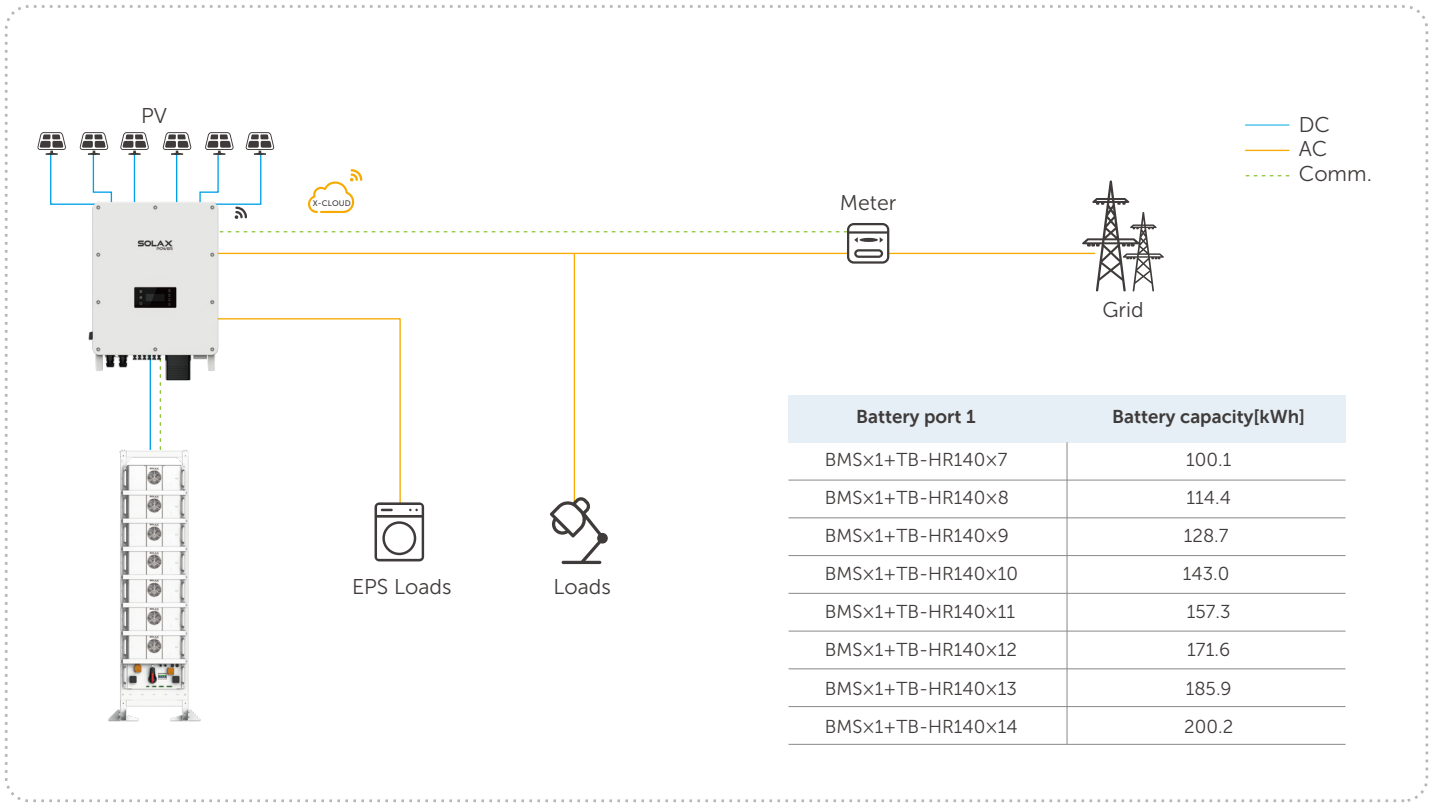

www.solaxpower.com

Global: +86 571-56260008
PL: +48 662 430 292

AU: +61 1300 476 529
DE: +49(0)6142 967 3009

UK: +44 2476 586998
NED: +31 (0) 8527 37932

info@solaxpower.com
service@solaxpower.com

V1.3 Information may be subject to modify without notice.
650.00116.00.EN-AU



AELIO+HR140

49.9kW/50kW/60kW/61kW
100.1kWh~400.4kWh

SolaX Split C&I Energy Storage Solution

🌐 solaxpower
🌐 www.solaxpower.com.au
✉ service@solaxpower.com.au

X3-AELIO



* Feature to be upgraded in the future

	X3-AELIO-49.9K	X3-AELIO-49.9K-P	X3-AELIO-50K	X3-AELIO-60K	X3-AELIO-61K
PV INPUT					
Max. recommended PV array power	100 kWp	120 kWp	100 kWp	120 kWp	
Max. PV input voltage ^①	1000 V				
Rated PV input voltage	650 V				
MPPT voltage range ^②	160 ~ 950 V				
Start-up voltage	180 V				
No. of MPP trackers / strings per MPP tracker	5 / 2	6 / 2	5 / 2	6 / 2	
Max. input current per MPPT	40 A				
Max. input short circuit current per MPPT	50 A				
AC INPUT & OUTPUT (ON-GRID)					
Rated output power	49.9 kW	49.9 kW	50 kW	60 kW	61 kW
Rated output current	75.7 A @ 220 V 72.4 A @ 230 V	75.7 A @ 220 V 72.4 A @ 230 V	75.8 A @ 220 V 72.5 A @ 230 V	91.0 A @ 220 V 87.0 A @ 230 V	92.5 A @ 220 V 88.5 A @ 230 V
Max. output apparent power	49.9 kVA	49.9 kVA	55.0 kVA	66.0 kVA	66.0 kVA
Max. output continuous current	75.7 A @ 220 V 72.4 A @ 230 V	75.7 A @ 220 V 72.4 A @ 230 V	83.4 A @ 220 V 79.8 A @ 230 V	100.0 A @ 220 V 95.7 A @ 230 V	100.0 A @ 220 V 95.7 A @ 230 V
Rated AC voltage	3 / N / PE, 220 / 380 V 3 / N / PE, 230 / 400 V				
Rated AC frequency	50 Hz / 60 Hz				
AC frequency range ^③	50 ± 5 Hz / 60 ± 5 Hz				
Adjustable power factor range	~ 1 (0.8 lagging to 0.8 leading)				
THDi (rated power)	< 3%				

Flexible Configuration

- Customizable battery setup: batteries can be flexibly configured according to customer site requirements, supporting both indoor and outdoor installations, as well as rack-mounted and stacked installations
- Parallel operation: supports up to 10 parallel systems, meeting power requirements from 49.9 kW to 600 kW
- Battery options: two battery choices available
- PV oversizing: supports up to 200% PV oversizing



Safe and Reliable

- Three-Phase unbalance: Inverter supports 100% three-phase unbalance.
- Long-Term overload: inverter supports 110% long-term overload.
- Seamless switching: inverter supports 10ms on-grid/off-grid switching
- Off-Grid overload: inverter supports 150% off-grid overload.



Intelligent and Convenient

- Remote monitoring: supports web/app remote data viewing and remote OTA updates
- Versatile operating modes: supports various operating modes to meet different application scenarios such as self-consumption, peak shaving, and demand management
- VPP Integration: supports VPP applications through IEEE2030.5, OpenADR
- Generator control: work seamlessly with generator to save fuel and back up

X3-AELIO-49.9K		X3-AELIO-49.9K-P		X3-AELIO-50K		X3-AELIO-60K		X3-AELIO-61K	
BATTERY									
Battery type		LFP							
Battery voltage range		180 ~ 820 V							
Max. charge / discharge current		160 A (80 A × 2)							
EPS (OFF-GRID) OUTPUT									
Rated EPS output voltage, frequency		3 / N / PE, 220 / 380 V, 50 Hz / 60 Hz 3 / N / PE, 230 / 400 V, 50 Hz / 60 Hz							
Rated EPS output power		49.9 kVA	49.9 kVA	50.0 kVA	60.0 kVA	61.0 kVA			
Max. EPS output power		75 kVA, 10s	75 kVA, 10s	75 kVA, 10s	90 kVA, 10s	90 kVA, 10s			
Switchover time		< 10 ms							
EFFICIENCY									
Max. efficiency		98.0%							
European efficiency		97.2%							
ENVIRONMENT LIMIT									
Ingress protection		IP66							
Protective class		I							
Operating temperature range		-35 ~ 60°C (derating +45°C)							
Max. operating altitude		3000 m							
Relative humidity		0 ~ 100% RH (condensing)							
Overvoltage category		Mains: III, Battery: II, PV: II							
GENERAL									
Dimensions (W × H × D)		670 × 820 × 257 mm							
Net weight		< 100 kg	< 105 kg	< 100 kg	< 105 kg	< 105 kg			
Cooling concept		Smart air cooling							
Communication interfaces		RS485-Meter, RS485-Monitor, RS485-Parallel (daisy-chain), CAN-BMS, CAN-Parallel (daisy-chain), USB, DI×2, DO×1, RCR (DI×4), DRM							
Topology		Non-isolated							
Certificates and approvals		CE, VDE4105, G99, AS4777, EN50549, CEI 0-21, IEC61727, PEA/MEA, NRS-097-2-1, RD1699, TOR							
PROTECTION									
Over / under voltage protection		Yes							
DC isolation protection		Yes							
DC reverse-polarity protection		Yes							
Grid monitoring		Yes							
DC injection monitoring		Yes							
Back feed current monitoring		Yes							
Residual current detection		Yes							
Over temperature protection		Yes							
Active anti-islanding method		Frequency shift							
Surge protection (DC / AC)		DC: Type II, AC: Type II							
Arc-fault circuit interrupter (AFCI)		Optional							
AC auxiliary power supply (APS)		Built-in							

① The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.

② Input voltage exceeding the MPPT voltage range may triggers inverter protection

③ The AC frequency range may vary from different country codes

TSYS-HR140



	T-HR100.1	T-HR114.4	T-HR128.7	T-HR143.0	T-HR157.3	T-HR171.6	T-HR185.9	T-HR200.2
SYSTEM SPECIFICATION								
Module quantity	7	8	9	10	11	12	13	14
Rated capacity	100.1 kWh	114.4 kWh	128.7 kWh	143.0 kWh	157.3 kWh	171.6 kWh	185.9 kWh	200.2 kWh
Usable energy (90%DOD)	90.1 kWh	103.0 kWh	115.8 kWh	128.7 kWh	141.6 kWh	154.4 kWh	167.3 kWh	180.2 kWh
Rated voltage	358.4 V	409.6 V	460.8 V	512 V	563.2 V	614.4 V	665.6 V	716.8 V
Operation voltage range	292 ~ 409 V	333 ~ 468 V	375 ~ 526 V	416 ~ 584 V	458 ~ 643 V	500 ~ 701 V	541 ~ 760 V	583 ~ 818 V
Rated operation current	140 A							
Maximum operation current	140 A							
Rated power	50.2 kW	57.4 kW	64.6 kW	71.7 kW	78.9 kW	86.1 kW	93.2 kW	100.4 kW
BATTERY MODULE								
Model	TB-HR140							
Module energy	14.3 kWh							
Rated module voltage	51.2 V							
Module capacity	280 Ah							
Cycle life (90% DOD)	6000							
Battery type	LFP							
Dimensions (W x H x D)	523 × 226 × 805 mm							
Weight	115 kg							
BMS								
Model	TBMS-R15							
Dimensions (W x H x D)	523 × 226 × 805 mm							
Weight	37 kg							
RACK								
Dimension (W x H x D)	576 × 2287 × 823 mm							
Weight	91 kg							
GENERAL								
Battery roundtrip efficiency (0.2C, 25 °C)	95%							
Charge / discharge temperature range (without heating)	0°C to 53°C (charge) -20°C to 53°C (discharge)							
Communication interfaces	CAN							
Installation type	Rack mounting							
Relative humidity	5 ~ 85% (non-condensing)							
Max.operation altitude	3000 m							
Environment	Indoor							
Protection degree	IP20							
Safety	EN 62477, IEC 62619							
Transport testing requirement	UN38.3							